

# Implementation Of Hybrid Wind Solar Energy System For Power Generation

<sup>1</sup>Jampani Ramya, <sup>2</sup>Madanu Joseph Rayanna, <sup>3</sup>Karnika Vijaya Bhaskar, <sup>4</sup>Jammula Pavan Kalyan, <sup>5</sup>Chenga Mani Kumar Varma, <sup>6</sup>Bheemavarapu Vineel  
<sup>3</sup>karnikavijayabhaskar@gmail.com, <sup>5</sup>manivarma102@gmail.com

**Abstract:**The main objective of this paper is to enhance the power transfer capability of grid interfaced hybrid generation system. Generally, this hybrid system is a combination of solar and wind energy systems. In order to get maximum and constant output power form these renewable energy systems at any instant of time, this paper proposes the concept of maximum power tracking techniques. The main concept of this maximum power point tracking controller is used for controlling the dc to dc boost converter. Finally, the performance of this MPPT based Hybrid system is observed by simulating using MATLAB/Simulation.

**Key Words:** MPPT technique, Solar Energy System, Wind Turbine System

## 1. INTRODUCTION:

In the present scenario renewable energy sources are incorporate along with the battery energy storage systems have mostly used for maintain the reliability of power. The number of renewable energy sources is increased as distribution sources; generally, to improve the power supply stability and power quality new strategies of operations are required. The common disadvantage of this both wind and solar power plants are as these generate unreliable power [1]. In order to overcome this problem a new technique is implemented i.e maximum power point tracking

algorithm which is applicable to both wind and solar plants. Dynamic performance of a wind and solar system is analyzed. There are some previous works on hybrid systems comprising of wind energy, photo voltaic and fuel cell have been discussed.All the energy sources are modeled using MATLAB software tool to analyze their behavior. A simple control method tracks the maximum power from the wind/solar energy source to achieve much higher generating capacity factors. The simulation results prove the feasibility and reliability of this proposed system [2]-[3].

## 2. PROPOSED HYBRID ENERGY SYSTEM:

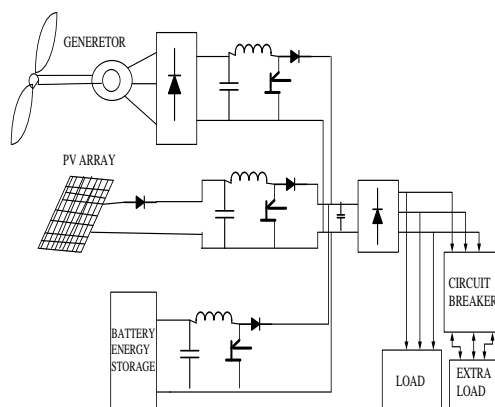


Figure 1: Configuration of Hybrid Energy System

Figure 1 shows the configuration structure for hybrid system based solar and wind energy systems. A rotor in the wind turbine captures the wind's kinetic energy, it consisting of two or more blades mechanically coupled to an electrical generator [4]. The mechanical power captured from wind by a wind turbine can be formulated as:

$$P_m = 0.5 \rho A C_p V^3$$

0.59 is the theoretical maximum value power coefficient value, It is based on two variables the pitch angle tip speed ratio (TSR).

With respect to longitudinal axis turbine blades are aligned at an angle that is the pitch angle. The linear speed of the rotor to the wind speed is  $TSR$ .

Wind turbine "C Vs.  $\lambda$ " curve is shown in Figure.2. In practical designs, 0.4 to 0.5 is the maximum achievable range for high speed turbines and for slow speed turbines it is in the range of 0.2 to 0.4. At opt its maximum value ( $C_{max}$ ) is shown in Figure 2. Which results in optimum efficiency and maximum power is captured from wind by the turbine.

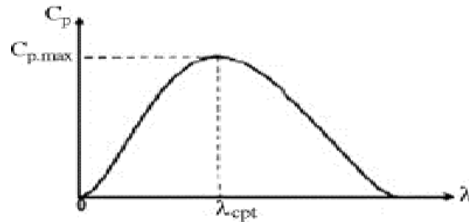


Figure 2: Power coefficient Vs Tip Speed Ratio

In photo voltaic (PV) system, solar cell is the basic component. PV array is nothing but solar cells are connected in series or parallel for gaining required current, voltage and high power. Each Solar cell is similar to a diode with a p-n junction formed by semiconductor material [5]. It produces the currents when light absorbed at the junction, by the photo voltaic effect. Figure 4 shows at a insulation output power characteristic curves for the PV array. It can be seen that a maximum power

point exists on each output power characteristic curve. The Figure 4 shows the (I-V) and (P-V) characteristics of the PV array at different solar intensities. The equivalent circuit of a solar cell is the current source in parallel with a diode of a forward bias. Load is connected at the output terminals. The current equation of the solar cell is given by [6] [7]:

$$I = H_{ip} - I_D - I_{sh}$$

$$I = H_{ip} - I_0 [\exp (q V_D / k t)] - (A_D / R_S)$$

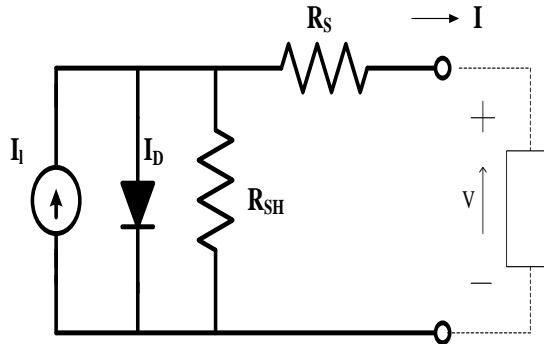


Figure 3: Equivalent circuit of PV Module

Power output of solar cell is  $P = V * I$

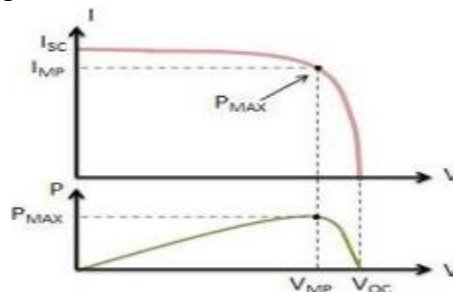


Figure 4: Output characteristics of PV Array

### 3. BATTERY ENERGY STORAGE:

The conversion of AC to DC is done by Battery energy storage system (BESS), it's having power electronic devices control system and batteries. Here the working of battery is conversion of electrical energy into chemical energy for storing purpose. By using DC power Batteries are charges and discharges. Bi-directional power electronic devices are regulating power flow between batteries and energy systems [8]. Based on type of battery it's having various merits and demerits like cost, weight, size, and power and energy capability. Lithium-Ion, Lead-Acid, Nickel Cadmium, Nickel Metal Hydrogen these are important types of energy storage technologies. High discharge rates are achieved by Lead-Acid batteries; these batteries are offering a better

solution for applications of energy storage. Long cycle life, high energy density, charge or discharge efficiency is high is qualities of sodium sulfur batteries. Nickel Cadmium (Iconic) batteries are better in all qualities and low maintenance requirements than the Lead-Acid batteries [9] [10], but these batteries cost is high when compared to Lead-Acid battery. It is a expensive alternate option. Nickel Metal Hydrogen (Nigh) batteries are used in hybrid electric vehicles and Pele-communication applications because these are compact batteries and light in weight.

The highest energy density among all types of batteries is Lithium-Ion batteries. They are currently used in cellular phones, computers, etc. and development of this technology is used in distributed energy storage applications. But, high

cost and limited applications of technology. Because of its sizes availability small, medium and large scale renewable energy systems and high rate of progress in development it is commanding the electronics market. During coupled operation, Changes in the outputs of wind and solar PV generation [11] [12] will change in the output of BESS and BESS must neutralize by quick changes in output power. Rate variation control or ramp rate control is applied for an associated coupled system to smooth their real power fluctuations. The information is processed by the Battery Energy System controller estimates the state of charge (SOC) of each battery cell and capacity of each battery cell and protects all the cells operate in the designed SOC range.

On a smaller scale the economic and technical merits of energy storage systems are as follows:

- Electrical supply quality and reliability are improved.
- For critical loads it supplies backup power.

#### 4. MAXIMUM POWER POINT TRACKING:

The efficiency of wind turbine, solar panel is improved by MPPT when they set to operate at point of maximum power. In different techniques

MPPT the most popular techniques are: Incremental Conductance method, Perturb and Observe, Fuzzy logic, neural networks. Initial photo voltaic array reference voltage and the initial rotor speed reference for the wind turbine are adjusted if the two systems output powers are does not match to their maximum powers [13]. We need to adjust the initial reference values in direction of increasing manner of output power and services. Until the wind turbine and photo voltaic array reach the maximum power points same process repeats. The characteristic power curve for a PV array is shown in Figure 4. If MPPT techniques considered it as a problem then it finds the voltage  $V_{MP}$  or current  $I$  and automatically under a given temperature and irradiance the PV array should get the maximum output power  $P_{MP}$  [14].

#### 5. SIMULATION RESULTS:

The complete system design i.e hybrid energy system is simulated using SIMULINK. A 10-kW wind/PV/BESS hybrid system was considered. The simulation study of system parameters are presented below and to predict their actual characteristics three energy sources are modeled accurately in SIMULINK. Figure 5 show the simulation diagram for hybrid system with solar and wind systems.J

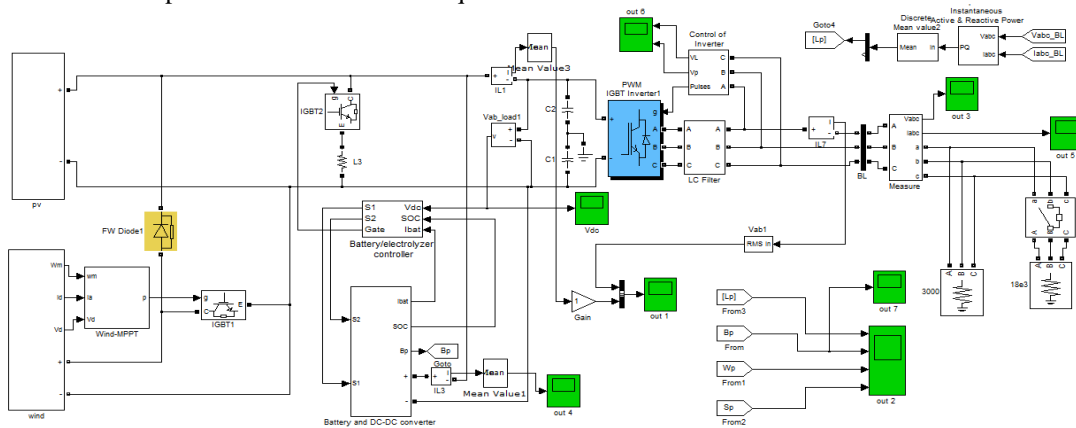


Figure 5: Simulation Diagram for Hybrid Wind-AV System

#### 6. SIMULATED GRAPHS:

- The load demand to fulfill is 10 KW throughout the time scale except at 4 to 5 sec when it increases to 14 KW.
- Solar energy drops its irradiance to 15 % from 2 sec.
- Wind turbine initially rotating at 5m/s excels to base speed 12m/s after 0.5 sec. Its rotating speed is decreased to 25 % of its base speed.

- All these conditions are clearly observed in the below graph.
- The Maximum Voltage is of PV Array is observed at around 640 V. the curve below explains that the varying irradiance is the deciding factor of the maximum voltage derivations

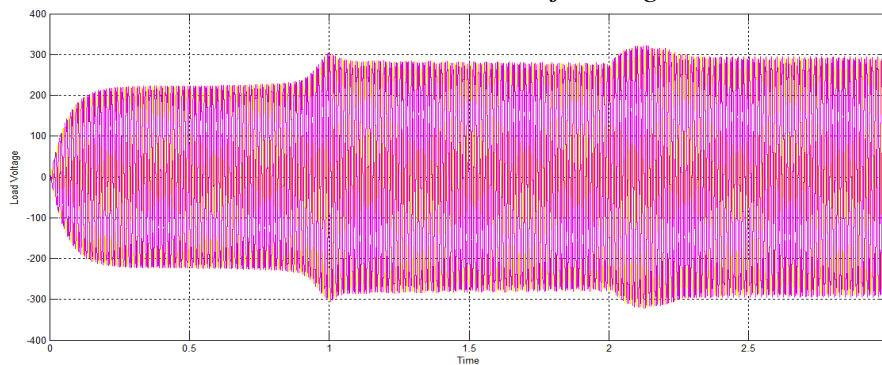


Figure 6: Output Load Voltage

Figure 6 shows the simulation result for output voltage across load terminals. From this result we observed that the voltage changes with

respect to changes occur in either wind or solar plants.

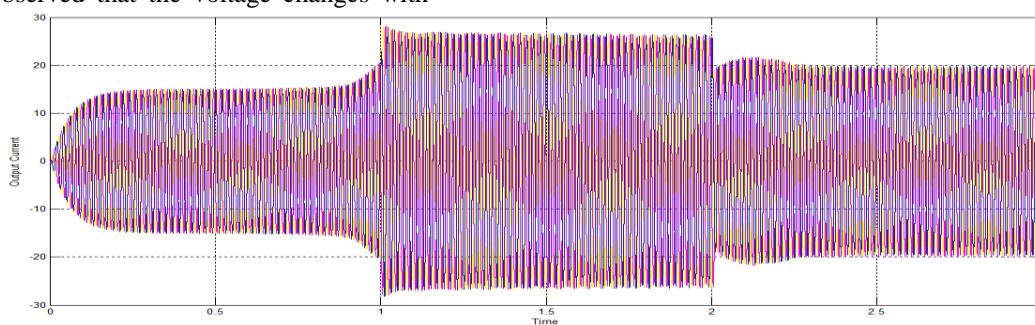


Figure 7: Output Load Current

Figure 7 show the simulation result of output current through the load. If the load is changed or suddenly extra load applied to the system then changes occur in the load current. In

this paper we suddenly applied the load during the time 1 sec to 2 sec, then in this period the current rises.

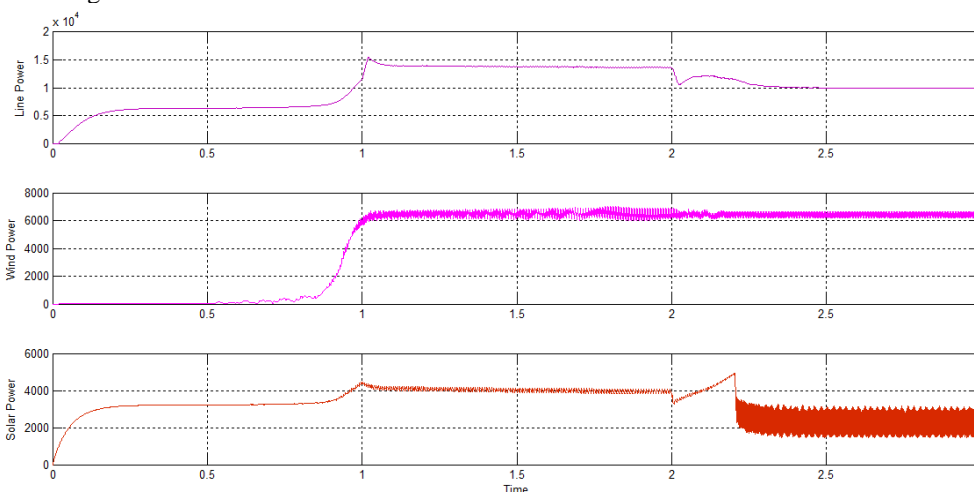


Figure 8: Powers: Line, Wind, Solar.

Figure 8 shows the wave form for powers which are obtained from the solar plant, wind energy system. And with this the line power is

depends. And Figure 9 shows the simulation result for wind turbine output voltage.

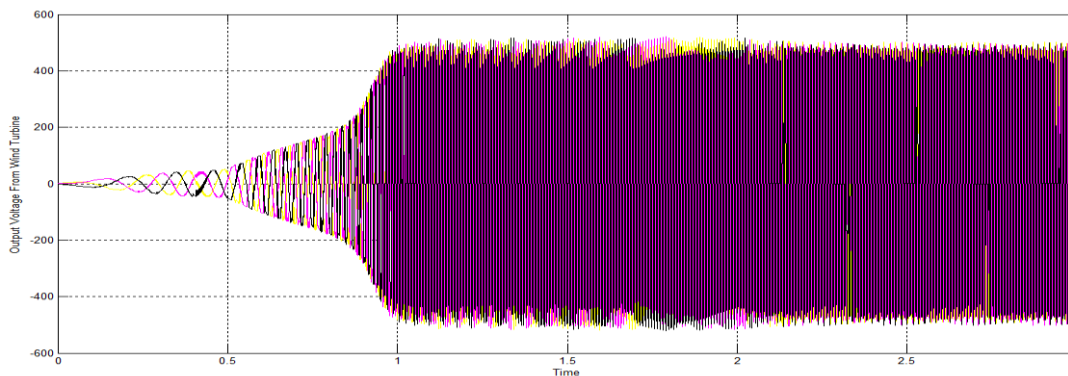


Figure 9: Output Voltage from Wind System

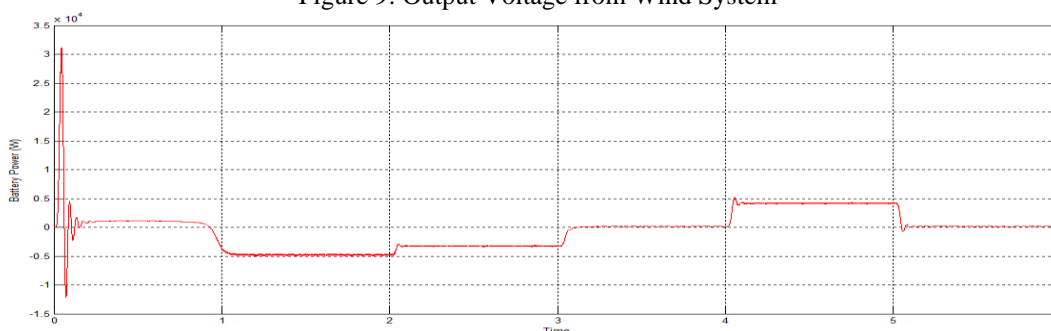


Figure 10: Output Power from Battery System

Figure 10 show the simulation result of output power from the battery system.

## 7. CONCLUSION

Output from solar & a wind system is converted into AC power output by using converter. In the given time additional load of 5 KW is connected by using Circuit Breaker. Under all operating conditions to meet the load the hybrid system is controlled to give maximum output power. Battery is supporting to wind or solar system to meet the load and Also, simultaneous operation for the same load.

## REFERENCES

- [1] Joanne Hail, Realize Balkhash, and Raven K. Jain, "A Hybrid Wind-Solar Energy System: A New Rectifier Stage Topology", in Applied Power Electronics Conference and Exposition (APEC), 2010 Twenty-Fifth Annual IEEE, pp 156-161, 21-25 Feb. 2010
- [2] S.K.Kim, J.H Aeon, C.H.Ch, J.B.Ah, and S.H.K won, "Dynamic Modeling and Control of a Grid-Connected Hybrid Generation System with Versatile Power Transfer," IEEE Transactions on Industrial Electronics, vol. 55, pp. 1677-1688, April 2008.
- [3] Design and Development of Energy Management System for DG Source Allocation in a Micro Grid with Energy Storage System. S. Exhilaration, P. Palliative and S. Baths. Indian Journal of Science and Technology, Vol 8(13), 58252, June 2015
- [4] Wind and Solar Power Systems Design Analysis and Operation Second Edition, by Edmund R. Patel, Taylor & Francis Group Publishing Co.
- [5] Y.M. Chen, Y.C.Li, S.C.Hung, and C.S.Ch eng, "Multi-purpose Converter for Grid-Connected Hybrid PV/Wind Power System," IEEE Transactions on Power Electronics, vol. 22, May 2007.
- [6] S.Jain, and V.Agar, "An Integrated Hybrid Power Supply for Distributed Generation Applications Fed by Convectional Energy Sources," IEEE Transactions on Energy Conversion, vol. 23, June 2008.
- [7] D.As, R.Email, L.Bu, D.Nichols, "An Optimal Design of a Grid Connected Hybrid Wind/Photo voltaic/Fuel Cell System for Distributed Energy Production," in Proc. IEEE Industrial Electronics Conference, pp. 2499-2504, Nov. 2005.
- [8] An Improved Artificial Fish Swarm Optimization for Proficient Solving of Advanced Unit Commitment Problem with Wind Energy and Pumped Hydro Storage. R. Standardization and R. Ayrshire. Indian Journal of Science and Technology, Vol 7(S6), 95-104, October 2014

- [9] Simultaneous Coordinated Design of Power System Stabilizer 3 Band (PSS3B) and SVC by using Hybrid Big Bang Big Crunch Algorithm in Multi-user Power System. S. Lilia and R. Ahmadinejad. *Indian Journal of Science and Technology*, Vol 8(S3), 62–71, February 2015
- [10] Comparative Analysis of Nature Inspired Algorithms Applied to Reactive Power Planning Studies. R. Iambi, R. Wariness and A. Meditation. *Indian Journal of Science and Technology*, Vol 8(5), 445-453, March 2015
- [11] Iranian Gabriela and Animal-Markup C.Nair, “Assessment of Battery Energy Storage Systems for Small-Scale Renewable Energy Integration,” *IEEE Conference*, January 2009.
- [12] Sodded Sera, Lamas Kernels, Remus Theodore and Fred Blabber, “Improved MPPT Algorithms for Rapidly Changing Environmental Conditions,” *IEEE Conference*, September 2006.
- [13] Evaluation of Uncertainty in Hybrid Plants, Including Wind Turbine, Photo voltaic, Fuel Cell, and Battery System using Fuzzy Logic. Chlamydiae Raze Ahmadinejad and Paparazzi Pomeranian. *Indian Journal of Science and Technology*, Vol 7(2), 113–122, February 2014.
- [14] Dynamic Analysis of PMSG Wind Turbine under Variable Wind Speeds and Load Conditions in the Grid Connected Mode. Maria Ashkhabad, Realize Venireman Maid Random and Absorb Misaddress. *Indian Journal of Science and Technology*, Vol 8(14), 51864, July 2015.