

A Review on Design and Analysis of Micro-Capacity Wind Turbine Components

Mr. Sagar R. Bachate¹, Mr. Sagar R. Bhone², Mr. Ram S. Chavan³, Mr. K.R.Sontakke⁴, Mr. Nilesh S. Jadha⁵

Department of Mechanical Engineering^{1,2,3,4,5} PLITMS Buldana, UG

Student's^{1,2,3,5}, Assistant professor⁴

Email: sagarbachate12@gmail.com¹, jadhaonilesh157@gmail.com⁵

Abstract —Wind energy, being easily accessible, environmentally friendly, and cost effective, has become one of the world's popular growing renewable energy sources of electricity generation. To spread this technology to mankind it is necessary to develop turbines in this way that people can use it individually and comfortably. In today's time many researches are directed towards the large sized wind turbines for producing the more and more energy at a minimum cost. Above all wind turbine blade is the most important part of the wind-mill to produce electricity from wind. The main aim of the blade is to capture most of the electrical energy from wind energy. Hence, blade and other important sub-parts should be designed in such a particular way that more and more energy can be produced from wind. Also, the blade is supposed to have a good strength and should be of less mass, so that it can be rotated with a much higher speed as compared to others. This review paper describes the available ways for structural analysis of wind turbine components. A wind mill particularly consists of a blade and a tower structure. Hence, the proper designing and analysis of the whole structure is of at most importance for desired output energy.

Keywords- Aerodynamics, Micro-Capacity, Wind Turbine, Renewable Energy, Rotor Blade, Wind Energy, Design & Analysis,

I. INTRODUCTION

Blade is a very important component in a wind turbine. Extraction of energy from the wind mainly depends on the blade's structure. Wind is very highly variable in nature, due to lower density of air blades of larger surface area are required to obtain higher efficiency. Hence, the design and manufacturing processes of the blade has very much influence on the blade's structural performance.

Designing of blade profile can be done through various methods such as FEM (finite element method) based software ANSYS, CFD (computer fluid dynamics), BEM (blade element method). CFD analysis can be used for prediction of aerodynamics. For calculating various types of loads on the wind turbine blade BEM theory is applied. Analysis of various stresses producing in the blade can be done by using ANSYS CFX. [1]

The blade consists of two faces i.e. suction and pressure side which are joined together by adhesives and stiffened by many shear webs. Wind turbine blades are subjected to many types of loading like gravitational forces, tensional loading, flap wise and edgewise bending. Flap wise bending is caused due to wind pressure whereas edgewise bending is caused by gravitational forces and torque of blade.

The first part of the current study focused on the aerodynamic design and performance analysis of small-scale horizontal axis wind turbine blade using the blade element momentum (BEM) method with the most updated and corrected model. In this case, the blade was designed with a single airfoil. Results show that the maximum coefficient of performance is 0.446 at the tip speed ratio 6.5 which is very good indication in preliminary stage power prediction. The 2nd part of the study concentrated on improving blade performance by modifying the blade with a combination of three airfoils. After that, a comparative study was done between "Blade-Element-Momentum" (BEM) analysis and "Computational-Fluid-Dynamics" (CFD) analysis of mixed airfoil small-scale horizontal axis wind turbine blades.

Wind as Energy Resource

The utilization of energy resources has played a key role in the development of human civilization. Now one of the greatest challenges in a modern century is to find out the reliable energy source. Conventional energy sources such as natural gas, coal, and fossil fuel have accelerate industrialization and modernization of different nations. However, the consternation around the world is that the emission of carbon dioxide into the atmosphere produced due to these traditional sources is the number one offender for the climate change. Climate change has the massive impact on the environment such as increased pollution, flooding, drought, the rise in sea levels, high temperature, etc. Moreover, the rise in ocean temperature and the acidity levels cause major changes to the natural ecosystems. So today's burning

question is that, besides producing sufficient energy for mankind could we be able to ensure a safe world for next generation? Hence, it should be committed to finding out the solution of using alternative energy resources besides the conventional sources. For this reason, renewable and sustainable energy is getting attention in current research. Wind turbine was one of the earliest non-animal sources of power used by humans. The earliest wind turbine designs were very simple and less complex; turbines were allowed to rotate at a rate corresponding to the wind's velocity. Wind turbines were used to pump water, grind grain and perform various other tasks. For these purposes, varying speed of the wind turbine impacted the effectiveness of the windmill. Further this clearly justified that controlling the rotational speed of the wind turbine will vary its output. Hence, allowing machines to run at variable speed greatly increased the total energy that can be extracted from the wind.

In rural areas of India, the word "electricity" is still like a dream, still millions of people in our country do not have access to electricity in their homes. According to facts, eight out of these ten homes without electricity are situated in far flung villages, some of which are geographically isolated and are often too sparsely populated. Thus, to supply electricity in these rural areas renewable energy like wind power is the cost effective and most feasible solution.

In recent years the cost of electric power generated using wind energy has dropped substantially. Since 2004, the price in the United States is now lower than the price of fuel generated electric power. Wind power is growing quickly, at 38%, up from 25% growth in 2002. It is proved to be the fastest growing form of electricity generation. However, one of the greatest difficulties in this century is to produce adequate energy. The expansion in world population and the persistent economic growth in many countries require more access to energy.

Renewable and sustainable energy is gradually gaining interest in recent research due to the considerations on the depleting nature of non-renewable resources and availability of renewable energy resources. It is necessary for any nation to pursue solutions or alternatives in renewable energy resources with current technologies and low cost in maintenance and operation. Renewable energy (for example solar, wind, and biofuel, hydro) have shown to be a feasible alternative sources of energy to other renewable sources of energy. Although traditional wind turbines are main sources of wind energy, the efficiency of wind turbines decreases with their size. Moreover, the losses due to friction in the rotating components such as bearings causes reduction of efficiency.

The wind turbine blade also suffers from fatigue and wear due to the rough weather. Furthermore, the questions arise about installment cost, spaces, maintenance cost, bird issues, sound pollution and environment pollution. These drawbacks of wind turbines urge emergence of a new concept of wind energy harvesting. The energy harvesting can be obtained from flow induced vibration of vortex blade-less wind generators. So, along with the design and performance analysis of small wind turbines, this work also investigated the possible extraction of power from wind energy by using a new conceptual vortex bladeless wind generator.

This kind of wind generator can also be used as reliable power sources in Nano grid. To ensure a reliable source of energy and smooth running system the first and foremost step is to build up a complete model where all components are integrated according to their linkage. It is a great challenge for a wind turbine to do this experimentally in the practical environment by trial and error method.

Rather, it is good practice to analyze the system by a well-established computational method. In this study, the main focus is to design a small scale wind turbine blade model, performance test of that model and further analysis of the modern small-scale wind energy system. There are two types of horizontal axis wind turbine blades were designed by considering all aerodynamic characteristics.

Categories of Wind Turbines

Large Capacity Turbine

Large wind turbines are classified by the wind speed. Turbines are designed from class I to class IV, with A or B referring to the turbulence. Below table describes the various classes of wind turbines.

Table 1: Classes of Wind Turbine

Class	Avg. Wind Speed (m/s)	Turbulence
IA	10	18%
IB	10	16%
IIA	8.5	18%
IIB	8.5	16%
IIIA	7.5	18%
IIIB	7.5	16%
IVA	6	18%
IVB	6	16%

Small Capacity Turbine

Small wind turbines are used for a variety of applications such as on- or off-grid residences, offshore platforms, telecom towers, rural schools, remote monitoring and various other purposes that require energy where there is no electric grid. Small wind turbines can be as small as a 50-watt electric generator for boats. In rural areas hybrid solar and wind powered units are used increasingly for traffic signage as they avoid the need of laying long cables from the nearest mains connection point.

Micro Capacity Turbine

Micro capacity wind turbines are turbine with power range in between 50 W to 2 KW. These turbines are mostly used for domestic application.

1.3 Aerodynamics Vs Structural Blade Concept

The aerodynamics is a very important aspect of wind turbines. There are different types of wind turbines in use and all of them are based on various energy extraction techniques.

Though the details of the aerodynamics depend very much on the topology. Topology are some fundamental concepts apply to all wind turbines. Every topology has a maximum power for a given flow. In general, all turbines can be classified as being either lift-based, or drag-based. The difference between these groups is the aerodynamic force which is used for energy extraction.

Designing of wind turbine is the process of defining the specifications of a wind turbine to extract maximum energy from the wind. Installation of a wind turbine consists of the necessary systems required to store the wind energy, convert mechanical rotation into electrical power, point the turbine into the wind and other systems for controlling of the wind turbine. Below are the certain structural concepts for particular components of wind turbine:

Blade: For wind turbine blades the ratio between the speed of the blade tips and the speed of the wind is called tip speed ratio. 3-blade-turbines are highly efficient with tip speed/wind speed ratios of around 6 to 7. Composite materials like E-glass fibre are used to produce blades. They result in low rotational inertia, which depicts that new wind turbines can accelerate quickly while keeping the tip speed ratio constant.

Tower: At higher altitudes wind velocities increases due to surface aerodynamic drag and air's viscosity. The variation in velocity with altitude is most dramatic near the surface. This variation follows the wind profile power law, which states that wind speed rises in proportion to the seventh root of altitude. On doubling the altitude of a turbine, there is an 10% increase in the expected wind speeds and 34% increase in expected power. Whenever the tower height is doubled to avoid the buckling, then the diameter of the tower is also doubled, which increases the amount of material required by a factor of at least four [8].

Generator: For larger horizontal-axis wind turbines, the electrical generator is mounted in a nacelle behind the hub of the turbine rotor, at the top of a tower. Typically wind turbines generate electricity using asynchronous machines which are directly connected with the electricity grid. Usually the rotational speed of the wind turbine is slower as compared to the equivalent rotation speed of the electrical network. Hence, a gearbox is installed between the rotor hub and generator.

Shaft and Foundation: Wind turbines are very tall slender structures which can cause a number of issues if all the structural design of the foundations are considered. The foundations for a conventional structure are designed mainly to transfer the vertical load to the ground. However, in the case of wind turbines, due to the high wind and environmental loads experienced, a significant horizontal dynamic load is present which needs to be restrained appropriately.

Gearbox: In wind turbines, the blades spin a shaft which is connected through a gearbox to the generator. The gearbox varies the turning speed of the blades around 15 to 20 rotations/minute for 1MW turbine that results in faster rotations which is required by the generator to generate electricity. The use of magnetic gearboxes helps in reducing the maintenance cost of wind turbines. [12]

II. LITERATURE REVIEW

Kebin peter Abraham *et.al* [1] they had done the finite element analysis of wind turbine blade to find out which material is suitable for blade. In this work they modelled blade in CATIA V5 and done analysis for different five blade materials viz, Structural steel, Stainless steel, Titanium alloy, Aluminium alloy, T-Graphite Epoxy. They found out the value of less Von Mises stress and less deflection in stainless steel.

Sulakhe Vishal *et.al* [2] they designed and done analysis of jet wind turbines blades they had given the design and calculation for 100 Watt electricity production and found that the efficiency of jet wind turbine is 3 to 4 times more than conventional wind turbine the efficiency of jet wind turbines increases due to its aerodynamic shape.

Amer C. *et.al* [3] they had done the structural analysis of a composite wind turbine blade in this work they developed a 5 m long wind turbine rotor blade, and done the finite element analysis and investigated both static and dynamic behaviour of blade. They found that tip deflections as flap-wise and edge-wise are 0.0186 m and 0.0039 m respectively.

Rohit K. Singh *et.al* [4] they stated that at Reynolds numbers of 75,000, 128,000 and 205,000 maximum lift coefficients of 1.72, 1.81 and 1.86 respectively can be obtained at the stall angle of 14 °. Also the lift coefficient is increased from 0.41 to 1.05 at Re= 38000 in the angle of attack 0-18°.

B. Bavanish *et.al* [5] they found that the goal in optimizing is to maximize the aerodynamics efficiency at single design wind speed. The optimized set obtained at blade solidity 0.15 are angle of attack 5 degree, tip speed ratio 8 and ratio of drag coefficient to lift coefficient as 0.025.

Sandra Eriksson *et.al* [6] they presented that there were significant differences between wind turbines depending on the direction of their axis of rotation.

C. Sicot *et.al* [7] they investigated the aerodynamic properties of wind turbine air foil and the influence of the inflow turbulence level on the stall mechanisms on the blade.

III. COMPONENTS OF WIND TURBINE

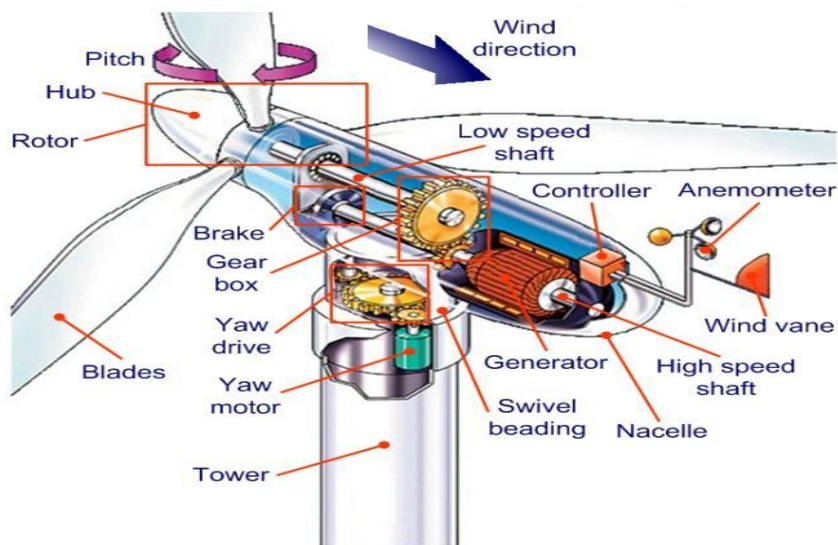


Fig 1: Major Components of a horizontal axis wind turbine

Anemometer:

It is a device used for measuring wind speed and it is also a common weather station instrument. The name is derived from "anemos", a greek word which means wind, which is used to describe any wind speed measurement instrument that can be used in meteorology. The first known description of this device was given by Leon Battista Alberti in 1450.

Generator torque:

When the wind speed is below rated speed, generator torque is used to control the rotor speed to capture as much power as possible. When the tip speed ratio is held constant at its optimum value the most of the power is captured. This means that as the wind speed increases, rotor speed will increase proportionally. The difference between the aerodynamic torque and generator torque is that aerodynamic torque is captured by the blades and the generator torque is applied to controls the rotor speed. The generator torque control is active when the blade pitch is typically held at a certain constant angle which captures the most power. The generator torque is typically held constant while the blade pitch is active.



Fig 2: permanent magnet generator

Generators convert mechanical power of rotating blades into electrical power. Two most common types of generators in large capacity wind turbines are induction generators and synchronous generators whereas for small capacity turbines they use direct drive generators. No gearbox is required in these direct drive generators.

Inverter:

An inverter is an electronic device or circuitry that helps to change direct current (DC) into alternating current (AC). The input voltage, output voltage and handling of power depends on the design of the specific circuitry. The inverter does not produce any power. The required power is generally provided by the DC source. A power inverter can be a complete electronic circuit or a combination of mechanical effect and electronic circuit.

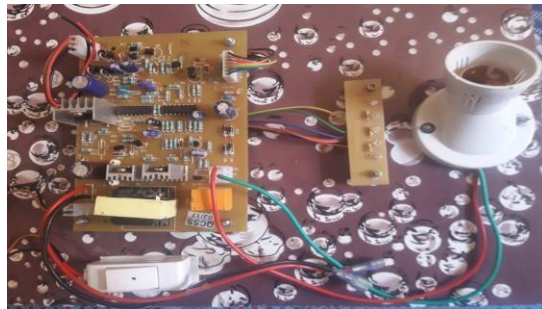


Fig 3: Inverter Circuitry

Battery:

Battery is used for storage purpose. Generated energy from generator is transferred towards the controller through battery. Micro capacity wind turbine uses battery to store energy and once it is fully charged it can be used for various domestic applications. Afterwards it can be replaced with another battery to store energy.



Fig 4: 12V Battery

IV. REVIEW ON STRUCTURAL ANALYSIS

International Journal of Research in Advent Technology (IJRAT)

(E-ISSN: 2321-9637)

Special Issue National Conference “CONVERGENCE 2018”, 09th April 2018

The aerodynamics is a very important aspect of wind turbines. There are different types of wind turbines in use and all of them are based on various energy extraction techniques.

Designing of wind turbine is the process of defining the specifications of a wind turbine to extract maximum energy from the wind. Installation of a wind turbine consists of the necessary systems required to store the wind energy, convert mechanical rotation into electrical power, point the turbine into the wind, and other systems for controlling of the wind turbine. Reason behind the structural analysis of wind turbine is that the stability of wind turbine is very important aspect.

Structural Analysis of Blade

Structural analysis of blade starts with the development of the blade model which is done using CATIA. Afterwards its file is imported in ANSYS workbench for static structural analysis purpose. Then from engineering data blade material is selected as E-glass fibre and its properties are mentioned as input to the software such as density, young modulus, poisson's ratio. Thereafter the task of meshing is performed with automatic generation of mesh after proper sizing, number of element's, cores and fine meshing. Accuracy of solver, structured or unstructured grids are also taken into consideration when meshing operation is performed. After mesh generation boundary conditions on model are applied. Mainly two forces are always in consideration i.e.:

Lift force: On upper surface of blade in vertical direction lift force is nothing but force required to rotate wind turbine blades. It arises due to wind speed impact on blade.

Drag Force: It is amount of force on blade surfaces which arises due to wind whirling action or wake rotation which causes opposing motion to rotation of blade and reduces the blade rotating speed. It drags the blade in opposite direction of rotation.

Structural analysis of Tower

The structural model of the tower can be represented by long, slender cantilever beam built from different segments having divergent but also uniform cross-sectional properties. The tower carries concentrated mass at its free end and it is cantilevered to the ground, approximating the inertia properties of rotor unit. The mass is assumed to be rigidly attached with the tower.

To check stability of tower structural analysis is more important. Also it is standalone type so safety issues are always considered. Wind impact may cause damage to pole or total weight of all components may exceed and it can result in bending of pole or buckling may take place so as to avoid all this safety problems structural analysis is done on ANSYS workbench. For tower we have used mild steel material. All the properties of mild steel are taken for analysis such as young's modulus, density, poisson's ratio.

V. REVIEW ON COMPONENT FABRICATION

Fabrication of Rotor Blade

The blades are made up of fibre glass, rather than wood as for following reasons:

1. The time for manufacture will be much lower and a number of blades can be produced in one batch. This will also reduce costs.
2. The use of moulds allows good repeatability and hence well balanced blades
3. Straight grained wood will be very difficult to find and expensive as well.

Fabrication of hub plate

Hub plate are made up of mild steel material plate having clamping arrangement for blades on it. It also has central hole to locate it with generator main shaft, additional holes are provided to reduce weight and heat dissipation rate.

Fabrication of Tower

We are using mild steel material for tower which is roof mounted and pole type. It was installed on top floor of the building. So as to achieve maximum wind condition and it was helpful for extraction of more energy from wind.

VI. SUMMARY & CONCLUSION

For Micro capacity wind turbines proper selection of all electrical components such as generator, battery, inverter plays a major role as well as selection of blade material is very important aspect in accordance to cost estimation, strength & properties of material. Selection of manufacturing process should be done on the basis of blade size, turbine capacity, blade material, manpower available.

International Journal of Research in Advent Technology (IJRAT)

(E-ISSN: 2321-9637)

Special Issue National Conference "CONVERGENCE 2018", 09th April 2018

Aerodynamic efficiency as well as structural efficiency both plays important role in design aspects of turbine. Structural requirement means blade must be thicker at root section where the hub is attached with blade, at that point bending stresses are more, and thin towards tip end.

Micro capacity wind turbine design is very important. These turbines are simple in construction and requires less amount of investment, since turbines are small in size that's why it can harness a limited amount of wind. Therefore, it can be used for low power applications, such as storage of batteries, street lighting, on busy road. As number of vehicles increased on busy road it will produce whirling motion due to which wind speed will increase and it results in faster rotation of wind turbine rotors. As the battery is portable we can use it at some other remote location for low voltage domestic applications.

From this review we proposed selection of major electrical components in details as well as foundation required for the installation of micro wind turbine. It is easy to develop micro wind turbine at minimum cost and fulfil the daily life electricity requirements.

The major findings are described below.

- 1) Instead of using multiple micro wind turbines, a single small scale wind turbine with comparatively larger diameter (still in small scale range) can produce sufficient power for Nano grid.
- 2) In the fixed pitch small scale wind turbine, the compensation made by blade twisting to get optimum angle attack has great significance on blade design.
- 3) Mixed airfoils are not usually used for a small-scale wind turbines. However, this work has shown that mixed airfoil wind turbine has satisfactory performance in small wind energy sector.

ACKNOWLEDGEMENT

It gives me great honor and satisfaction in presenting this comprehensive review on “Design and Analysis of Micro-Capacity Wind Turbine Components”. I will always be thankful to my project guide Prof K.R.Sontakke, for his advice and guidance in this work and his tireless support in ensuring its completion. I would also like to express my thanks to Mechanical Engineering Department and the faculty members for their precious support.

REFERENCES

- [1] Abraham Kebin Peter, H. S. (2016). “Finite Element Analysis of Wind Turbine Blade”, *IJRASET*, 4(II), 469 - 478.
- [2] Vishal N Sulakhe, Satish G Bahale (2013) “Design and Analysis of Jet Wind Turbine”, *International Journal of Mechanical Engineering and Robotics Research*, Vol. 2, No. 3, July 2013, ISSN 2278 – 0149.
- [3] C. Amer, M. S. (2014). “Structural analysis of a Composite Wind Turbine Blade”, *International journal of Mechanical, Aerospace, Engineering*, 8(7), 1264 - 1270.
- [4] Ronit K. Singh, M. Rafiuddin Ahmed, Mohammad Asid Zullah, Young-Ho Lee (2012), “Design of a low Reynolds number airfoil for small horizontal axis wind turbines”, *Renewable Energy*, Volume 42, 2012, Pages 66-76, ISSN 0960-1481.
- [5] B. Bavanish, K. Thyagarajan (2013) “Optimization of power coefficient on a horizontal axis wind turbine using bem theory”, *Renewable and Sustainable Energy Reviews*, Volume 26, 2013, Pages 169-182, ISSN 1364-0321.
- [6] Sandra Eriksson, Hans Bernhoff, Mats Leijon, (2008) “Evaluation of different turbine concepts for wind power”, *Renewable and Sustainable Energy Reviews*, Volume 12, Issue 5, 2008, Pages 1419-1434, ISSN 1364-0321.
- [7] C. Sicot, P. Devinant, S. Loyer, J. Hureau (2008) “Rotational and turbulence effects on a wind turbine blade”. Investigation of the stall mechanisms, *Journal of Wind Engineering and Industrial Aerodynamics*, Volume 96, Issue 8, 2008, Pages 1320-1331, ISSN 0167-6105.
- [8] Amano R.S., Malloy Ryan J. (2010) “Improvement of wind turbine blade aerodynamics”, *INREC10*, Amman, Jordan.
- [9] Tenguria Nitin, et.al.(2010) “Design and finite element analysis of horizontal axis wind turbine blade”. *International journal of applied engineering research*. Dindigul, volume 1, No 3, 2010.
- [10] Mishnaevsky Leon Jr. (2009). “Composite materials in wind energy technology”, *Risø National Laboratory for sustainable energy*. Technical university of Denmark, Denmark.
- [11] Wu Wen- Hsiang. et. al. (2012). “Structural Analysis and Design of the Composite Wind Turbine Blade”. Springer.
- [12] Thomsen O.T, (2009), Sandwich materials for the wind turbine blades- Present and future, *Journal of sandwich structures and materials*. Vol. 81, No.7, 322-326.
- [13] Griffiths R.T 1977. “The effect of aerofoil characteristics on windmill performance”. *Aeronautical Journal*. Vol. 81, No. 7, pp 322-326.
- [14] Tenguria Nitin, et.al. (2010). “Investigation of blade performance of horizontal axis wind turbine based on blade element momentum theory (BEMT) using NACA airfoils”. *International Journal of engineering, science and technology*, Vol. 2, No. 12, 2010, pp. 25-35.
- [15] Reddy Srinivasan M., Raju Subha N.V, (2006). “The material selection for typical wind turbine blades using MADM approach and analysis of blades”.

- [16] Jensen Molholt (2003). "Compression strength of a fiber composite main spar in a wind turbine blade". Risø-R-1393(EN).