

Rectangular Slot Microstrip Antenna With L Shaped Ground For Ultra Wideband Applications

Miss.V.S.Varpe

Dept. of Electronics & Telecommunication Engineering
Amrutvahini College of Engineering,
Sangamner, Maharashtra, India
vaishalivarpe72@gmail.com

Prof. R.P.Labade

Dept. of Electronics & Telecommunication Engineering
Amrutvahini College of Engineering,
Sangamner, Maharashtra, India
rplabade@gmail.com

Abstract—The given paper presents a compact microstrip fed rectangular monopole antenna for ultra wideband communication. The basic antenna consists of rectangular shaped slot on ground plane, which achieved UWB frequency band operation from 2.9-11.2GHz. The proposed antenna is designed using low cost FR-4 substrate of dielectric constant 4.4, loss tangent of 0.02 and thickness of 1.6mm. CADFEKO suite(7.0) is used for simulation and optimization with stable radiation patterns. The designed antenna has efficiency above 80% and provides an excellent bandwidth of 8.3GHz(117.73%) which satisfied UWB requirement for VSWR<2. Parametric study is carried out for different parameters of UWB antenna.

Keywords—ultra wideband(UWB); federal communication commission, slot antenna;

I. INTRODUCTION

According to FCC UWB is a very encouraging technology that have a huge unlicensed bandwidth of 7.5GHz ranging from 3.1GHz to 10.6GHz [1]. UWB communication system has been favourable and studied in the college and industry, due to various advantages such as high data transmission rate, low cost, ease of integration and also low transmitting power consumption as compared to other. In ultra wideband communication different types of antennas were used. Slot antenna is favourable which satisfy demand of UWB. Different shapes of slot such as rectangle, circle, elliptical, beveled, tapered has been used for enhancing wide impedance bandwidth. Narrow the slot lower the frequency variation. Higher the slot then higher frequency variation in resonant frequency.

In [2], an inverted T-shaped conductor backed plane was used inside rectangular shaped slot on bottom layer which acquired UWB span from 3.04 to 10.87GHz. A rectangular radiating patch was etched on front side of substrate in [3] and tapered slot was cut from bottom side of substrate on ground plane, achieved an over -10dB frequency bandwidth from 3.04 to 10.87GHz. Differential wide slot UWB antenna is presented in [4]. Four corners of ground plane are truncated

to improve gain and radiation pattern. Inverted T shaped slot was cut in the square radiating patch and inverted T shaped conductor backed plane was used in [5]. CPW -fed was used [6]. In that corners of rectangular tuning stub was beveled and also two semi circular slots were etched to improve UWB BW. To achieve wide impedance bandwidth of small planar antenna number of experiments have been carried by researchers [7-9].

In this letter, a design of compact rectangular slot is proposed. To increase bandwidth of UWB antenna wide rectangular slot is cut from the L-shaped ground plane. Simulated results show reflection coefficient < -10dB from 2.9 to 11.2GHz. The given antenna is simple in structure.

II. ANTENNA DESIGN

Fig.1 consists of rectangular shaped patch of dimension 12 x 16 x 1.6 mm³ is etched on the one side of FR-4 substrate having relative permittivity of 4.4 and loss tangent of 0.02.

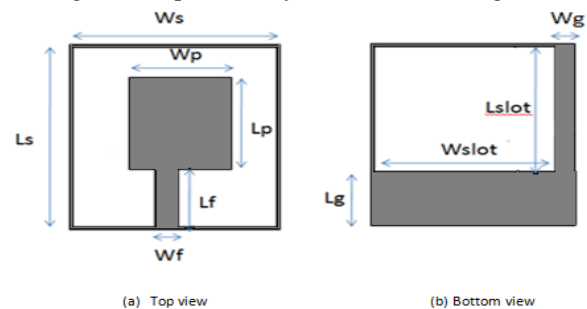


Fig.1 Geometry of proposed antenna

The feedwidth of offset microstrip line can be calculated by using (1), so as to achieve 50Ω characteristic impedance [10][11].

$$z = \frac{377}{\sqrt{\epsilon_r [(w/t) + 2]}} \quad (1)$$

Here, ϵ_r is the dielectric constant of 4.4, w is width of feedline, t is the thickness of 1.6mm and z is the characteristic impedance.

Feedwidth is inversely proportional to impedance of an antenna. To achieve wide impedance bandwidth, a wide

rectangular slot is cut on bottom side of ground and formed L-shaped ground plane. The width and length of rectangular slot is chosen as 31.5mm and 26.5mm so as to obtain good result over entire UWB. The optimized parameter for given UWB antenna as $W_s=33\text{mm}$, $L_s=35.5\text{mm}$, $W_p=12\text{mm}$, $L_p=16\text{mm}$, $W_f=2.8\text{mm}$, $L_f=10.25\text{mm}$, $W_g=1.5\text{mm}$, $L_g=9\text{mm}$, $W_{\text{slot}}=31.5\text{mm}$, $L_{\text{slot}}=26.5\text{mm}$. Simulation is carried out on CADFEKO (7.0) EM simulation software[12].

A. Evolution of UWB Antenna

Basic rectangular monopole antenna with full ground provide impedance Bandwidth of 0.14GHz(1.98%) from 6.975-7.115GHz as show in Fig.2. It is observed that 1.98% impedance BW is very small as compared to Ultra wideband impedance BW. In order to achieve the wide impedance bandwidth over entire UWB a rectangular shaped slot is cut from the full ground plane which formed U-shaped ground plane. After forming U-shaped ground bandwidth is increased from 3.4 to 10.31GHz. So still total UWB is not achieved. Hence a wide rectangular shaped slot is cut from full ground formed partial ground plane, which has impedance BW from 3.3-10.9GHz. So here is also still UWB lower frequency band is not achieved. Then wide rectangular slot is cut from full ground plane in such a way that it form L-shaped ground plane. So new acceptable impedance BW is from 2.9-11.2GHz(117.73%).


Percentage of bandwidth can be calculated by using (2) and (3)

$$\% \text{ Bandwidth} = \frac{(FH - FL)}{FC} \quad (2)$$


Where,

$$FC = \frac{FL + FH}{2} \quad (3)$$


Here, FH is higher frequency operation of UWB antenna in GHz, FL is lower frequency operation of UWB antenna in GHz and FC is a centre frequency of UWB antenna in GHz.




Step I. (Full ground)



Step II.(U-shape ground)




Step III.(Partial ground)



Step IV.(L-shape ground)

(a)

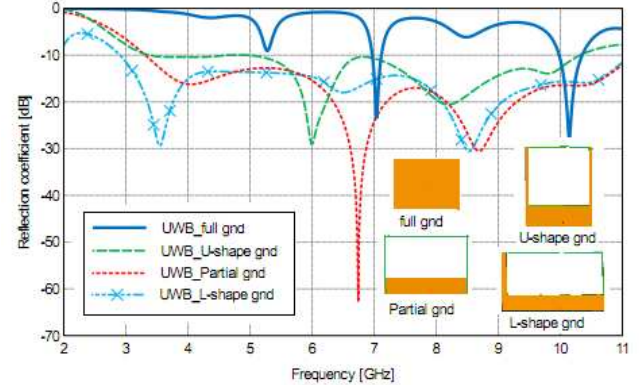

(b)

Fig.2 (a) Evolution of UWB antenna (b) Simulated reflection coefficient for different ground plane

III.SIMULATION RESULTS AND DISCUSSION

The overall performance of UWB antenna depends on number of parameters such as width(W_g) and length(L_g) of L-shaped ground plane, width(W_p) and length(L_p) of patch and feedwidth(W_f). Hence ,further parametric study is carried out.

Fig.3 represents the simulated results for different values of width of ground such as $W_g=1, 1.5$ and 2mm . For all these values of W_g antenna resonates for entire ultra wideband. But for $W_g=1.5\text{mm}$, return loss is maximum for lower and higher frequency of operation. Hence optimum results are obtained for $W_g=1.5\text{mm}$.

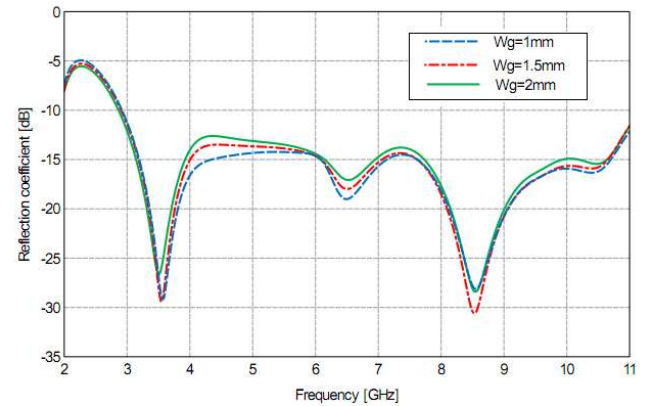


Fig.3 Return loss vs. frequency graph for different width of ground plane

The effect of ground length(L_g) is presented in Fig.4 .It

shows simulated results for different values of length of ground such as $L_g=8,9$ and 10mm . For $L_g=8\text{mm}$ total UWB is not achieved at higher frequency range. For $L_g=10\text{mm}$ return loss is very poor at 4.3GHz frequency. Only for $L_g=9\text{mm}$ we achieved satisfied UWB.

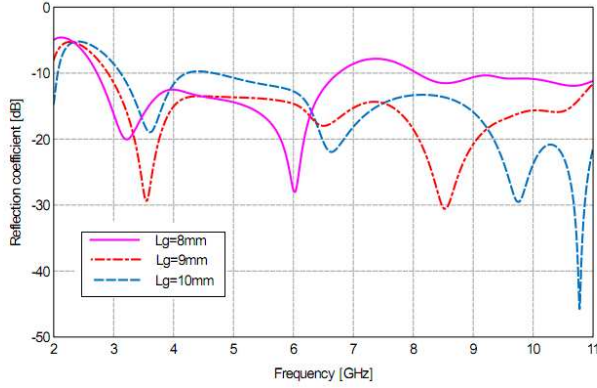


Fig.4 Return loss vs. frequency graph for different length of ground plane

Fig.5 shows return loss for different length of patch. For $L_p=15\text{mm}$ and $L_p=17\text{mm}$ return loss is maximum at lower and higher frequency band as compared to $L_p=16\text{mm}$, but there impedance bandwidth start from 3GHz . So $L_p=16\text{mm}$ is best optimized result whose reflection coefficient $< -10\text{dB}$ is from $2.9-11.2\text{GHz}$.

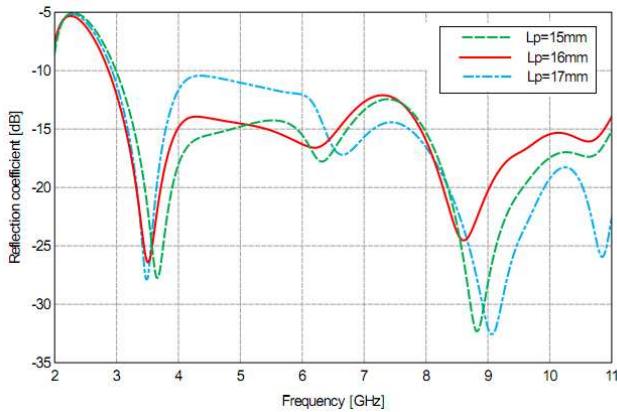


Fig.5 Return loss vs. frequency graph for different length of patch

Fig.6 shows return loss for different width of patch. For $W_p=11\text{mm}$ return loss is not maximum at lowest and highest frequency band and for $W_p=13\text{mm}$ impedance BW is not upto 11GHz frequency band. Only for $W_p=12\text{mm}$ return loss is maximum at higher frequency band and achieve a wide impedance BW upto 11.2GHz . So the optimum results are obtained for $W_p=12\text{mm}$.

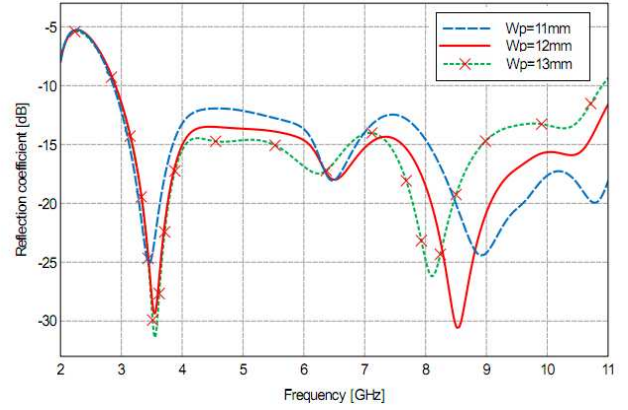


Fig.6 Return loss vs. frequency graph for different width of patch

Fig.7 shows reflection coefficient for different width of feedline. Here only for $W_f=2.8\text{mm}$ return loss is maximum as compared to $W_f=2.7\text{mm}$ and $W_f=2.9\text{mm}$. Hence, optimized results are obtained for $W_f=2.8\text{mm}$.

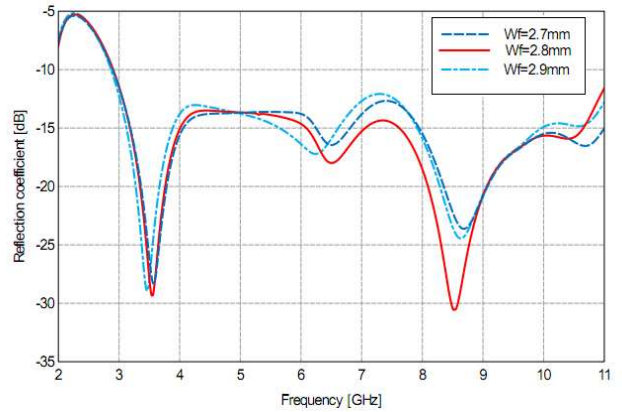


Fig.7 Return loss vs. frequency graph for different width of feedline(W_f)

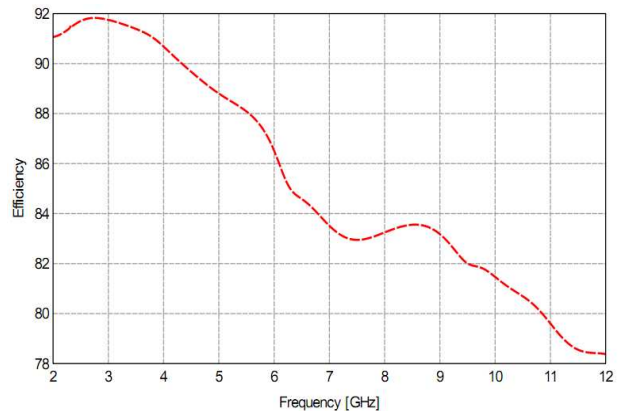


Fig.8 Efficiency vs. frequency graph of proposed UWB antenna

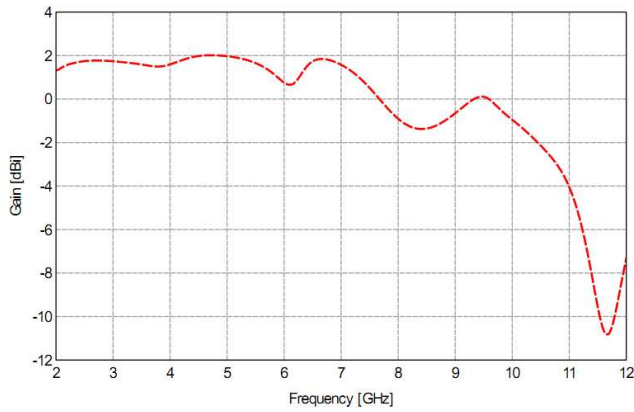


Fig.9 Gain vs. frequency graph of proposed UWB antenna

As show in Fig.8 efficiency is 91% at 3.1GHz and 80% at 10.6GHz. So the average efficiency is 85.5%. It decreases at higher frequency range due to dielectric losses. Gain is maximum i.e. 2dBi at 4.5GHz. Fig.10 shows surface current distribution at 5.6GHz. Current distribution is more along the offset microstrip feed line and L-shaped ground plane. Current distribution is less along rectangular slot.




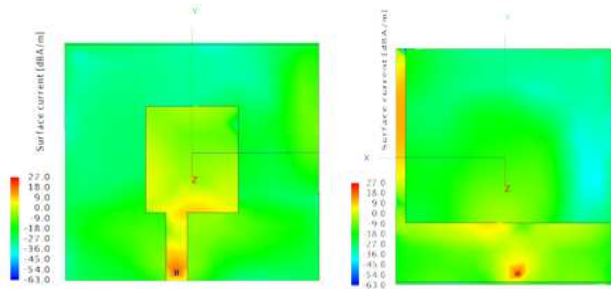


Fig.10 Surface current distribution of UWB antenna at 5.6GHz

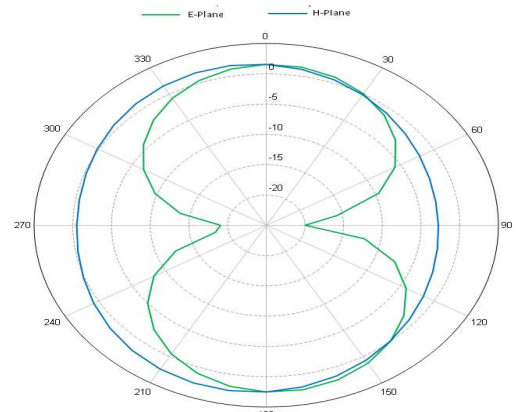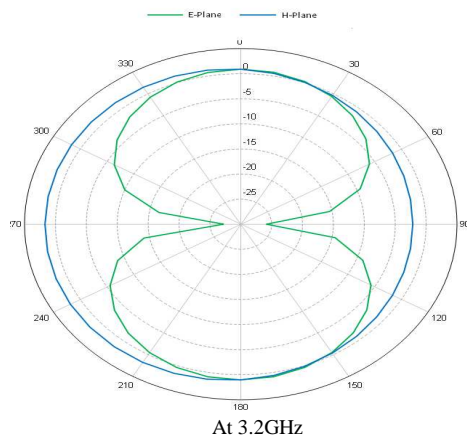

At 5GHz

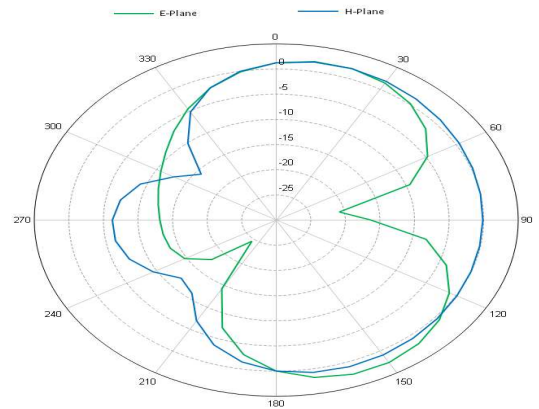

At 8.6GHz

Fig.11 Simulated radiation pattern in E-plane and H-plane at 3.2, 5 and 8.6GHz

Fig.11 shows that proposed antenna has co-polarised field nearly omnidirectional in H-plane ($\Phi=0^\circ$) and bidirectional radiation patterns in E-plane ($\Phi=90^\circ$). Radiation pattern at 8.6GHz is distorted due to reduction in efficiency at this frequency range.

IV.CONCLUSION

The UWB antenna is simple in structure and satisfied UWB need for $VSWR < 2$. Large Impedance bandwidth is achieved from 2.9 to 11.2GHz (117.73%) using wide rectangular shaped slot on ground plane. Stable radiation patterns are obtained by EM simulation software CADFEKO suite (7.0). It is observed that radiation patterns are nearly omnidirectional in H-plane and bidirectional in E-plane for UWB frequency band. Efficiency of antenna is above 80% for entire operating band. Hence the given antenna is best choice for personal wireless communication.

REFERENCES

- [1] "Federal Communication Commission revision of Part 15 of the commission's rules regarding ultra-wideband transmission systems," FCC, Washington, DC, First Report and Order FCC, 02, V48, 2002.
- [2] Mohammad Ojaroudi & Nasser Ojaroudi, "Ultra-Wideband Small Rectangular Slot Antenna With Variable Band-Stop Function", IEEE

TRANSACTIONS ON ANTENNA AND PROPAGATION,VOL.62,
NO.1,JANUARY 2014.

[3] Rezaul Azim, Mohammad Tariqul Islam,Senior Member,IEEE,& Ahmed Toaha Mobashshsher, "Design of a Dual Band-Notch UWB Slot Antenna by Means of Simple Parasitic Slits",IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS,VOL.12,2013.

[4] Li Li, Jing Yang, Xinwei Chen, Xiaowei Zhang, Runbo Ma, & Wenmei Zhang, "Ultra-Wideband Differential Wide-Slot Antenna With Improved Radiation Patterns and Gain",IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION,VOL.60,NO.12,DECEMBER 2012.

[5] M.Ojaroudi, Sh. Yazdanifard, N. Ojaroudi, and M.Naser Moghaddasi, "Small Square Monopole Antenna With Enhanced Bandwidth by Using Inverted T-Shaped Slot and Conductor-Backed Plane",IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION,VOL.59,NO.2,FEBRUARY 2011.

[6] Seyed Ramin Emadian & Javad Ahmadi-Shokouh, "Very Small Dual Band Notched Rectangular Slot Antenna with Enhanced Impedance Bandwidth",DOI 10.1109/TAP.2015.2456905,IEEE Transaction on Antenna and Propagation.

[7] M. J. Ammann and Zhi Ning Chen, "A Wide-Band Shorted Planar Monopole with Bevel",IEEE Trans. On Antennas and Propagation,Vol.51,No.4, April 2003,901-903.

[8] Kumar,G.,and K.C.Gupta, "Broadband Microstrip Antennas Using Additional Resonators Gap-Coupled to the Radiating Edges," IEEE Trans. On Antennas Propagation,Vol.AP-32,December 1984,1375-1379.

[9] Chao-Ming Wu,Wideband dual frequency CPW-fed triangular monopole antenna for DCS/WLAN application, Int .J.Electron Common.(AEU) 61 (2007) Pp 563-567.

[10] G.Kumar and K.P.Ray, "Broadband Microstrip Antennas,"Artech House,1992.

[11] C.A.Balanis, "Antenna Theory Analysis and Design," 3rd Edition, *John Wiley and Sons*,New York,1997.

[12] CAD-FEKO Simulation software,Version 7.0 UserManual.